


BCS 200

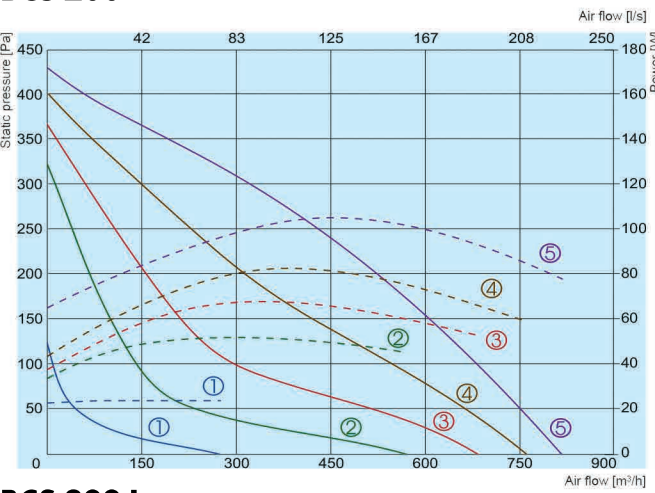


Performance
Power consumption

- ① 80V
- ② 120V
- ③ 140V
- ④ 170V
- ⑤ 230V

	Lwa total, dB(A)	Lwa, dB(A)						
		125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz
Inlet	70	46	53	62	66	63	64	54
Outlet	71	45	54	61	68	64	65	53
Surrounding	55	22	24	41	49	53	43	40

Measured at 653 m³/h, 125 Pa

BCS 200 L

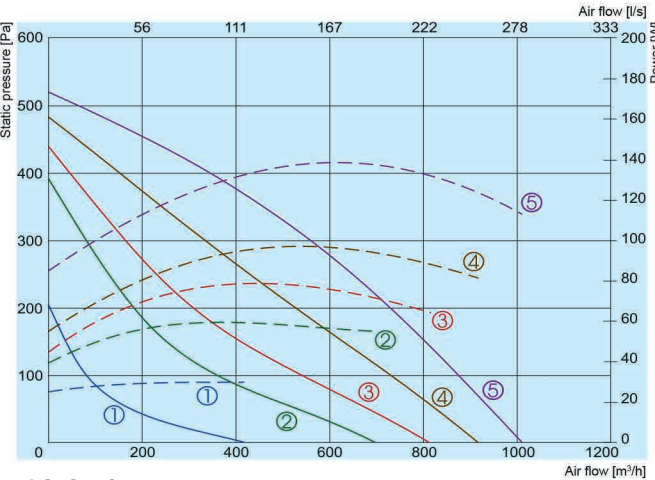


Performance
Power consumption

- ① 80V
- ② 120V
- ③ 140V
- ④ 170V
- ⑤ 230V

	Lwa total, dB(A)	Lwa, dB(A)						
		125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz
Inlet	73	53	60	66	69	66	65	63
Outlet	74	54	62	65	70	67	67	63
Surrounding	58	25	35	46	53	55	47	45

Measured at 646 m³/h, 123 Pa

BCS 250

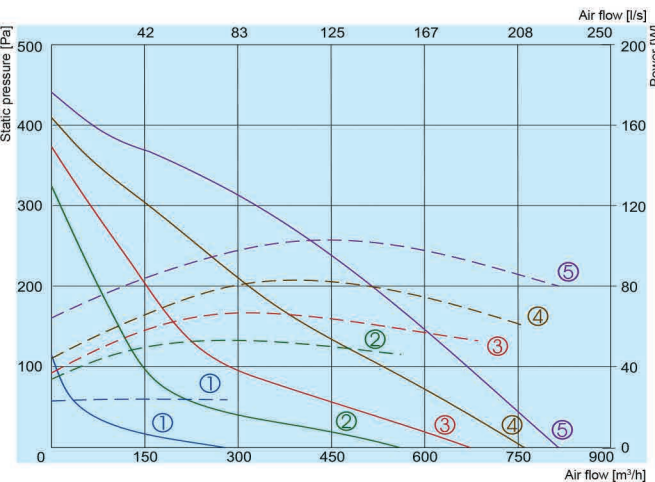


Performance
Power consumption

- ① 80V
- ② 120V
- ③ 140V
- ④ 170V
- ⑤ 230V

	Lwa total, dB(A)	Lwa, dB(A)						
		125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz
Inlet	71	41	52	61	66	66	64	56
Outlet	72	43	53	60	68	67	65	57
Surrounding	52	24	30	38	48	47	45	40

Measured at 634 m³/h, 125 Pa

BCS 250 L

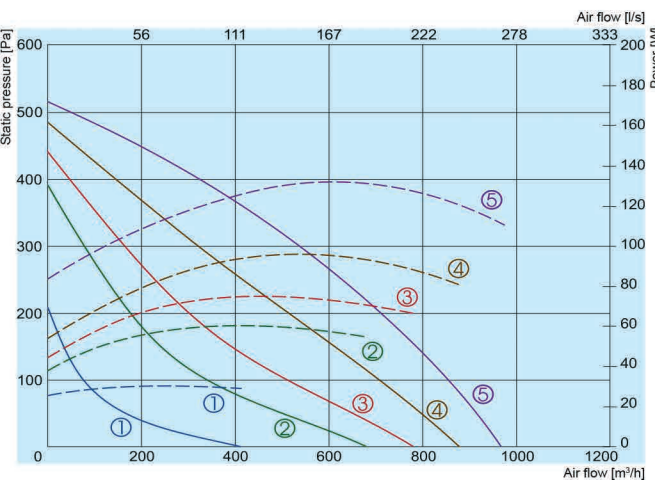

Performance
Power consumption

- ① 80V
- ② 120V
- ③ 140V
- ④ 170V
- ⑤ 230V

	Lwa total, dB(A)	Lwa, dB(A)						
		125 Hz	250 Hz	500 Hz	1 kHz	2 kHz	4 kHz	8 kHz
Inlet	74	54	62	67	69	67	67	65
Outlet	75	55	63	66	70	68	67	67
Surrounding	55	33	38	47	50	48	47	46

Measured at 610 m³/h, 123 Pa